
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price.
All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION


Block D

24 houses
datum 62.644
4 steps, 213 FB forms

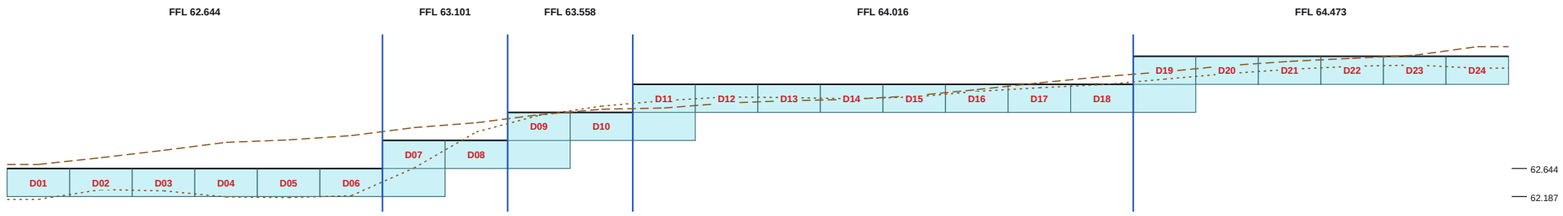


Block E

11 houses
datum 64.040
1 step, 95 FB forms

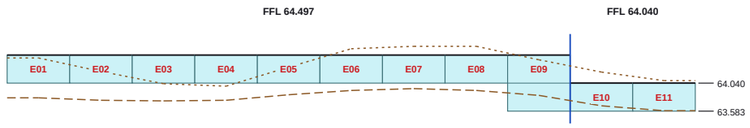


Block F

14 houses
datum 66.990
1 step, 117 FB forms

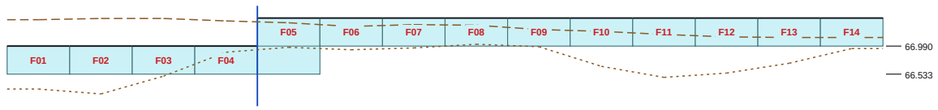


Block G

7 houses
datum 64.630
1 step, 66 FB forms

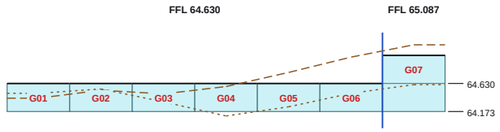


Block H

17 houses
datum 63.324
2 steps, 146 FB forms

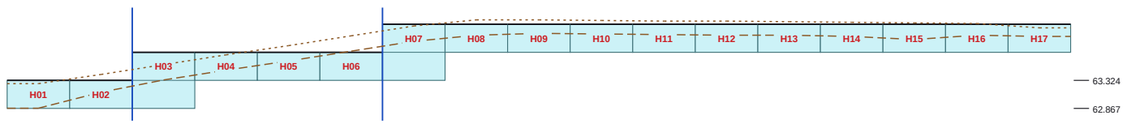


Block I

4 houses
datum 64.090
0 steps, 35 FB forms



Block J

14 houses
datum 64.691
3 steps, 133 FB forms

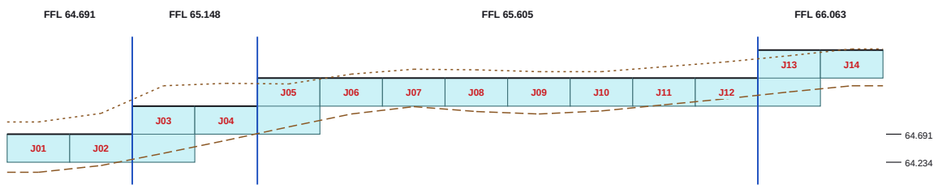

DEVELOPED FOOTING ELEVATIONS

Scale H 1:400 / V 1:100 (x4) @ A3 | front walls seen from the front

Footing course ICF (course lines 457.2); heavy top = GF FFL
Existing ground at the FRONT face (LiDAR, per plot)
Existing ground at the REAR face
Step (party wall)
Right ticks: m AOD

Do not scale. All dimensions in mm. Check all dimensions on site.

STEPPED FOOTING SCHEDULE

PER BLOCK

Block	Houses	Datum FFL	Steps	2-crs	Std	XR35	FB forms
D	24	62.644	4	4	108	105	213
E	11	64.040	1	1	44	51	95
F	14	66.990	1	1	56	61	117
G	7	64.630	1	1	28	38	66
H	17	63.324	2	2	72	74	146
I	4	64.090	0	0	12	23	35
J	14	64.691	3	3	64	69	133
Total	**91**		**12**	**12**	**384**	**421**	**805**

Datum FFL = the block's lowest GF FFL (m AOD). 2-crs = houses with 2 FB courses (high side of a step). Std / XR35 = 6in Standard (party) / 6in XR35 (external) FB forms incl. corners and pre-cuts.

STEPS

Block	Party wall	Low FFL	High FFL	2 FB crs
D	D06 / D07	62.644	63.101	D07
D	D08 / D09	63.101	63.558	D09
D	D10 / D11	63.558	64.016	D11
D	D18 / D19	64.016	64.473	D19
E	E09 / E10	64.040	64.497	E09
F	F04 / F05	66.990	67.447	F05
G	G06 / G07	64.630	65.087	G07
H	H02 / H03	63.324	63.781	H03
H	H06 / H07	63.781	64.238	H07
J	J02 / J03	64.691	65.148	J03
J	J04 / J05	65.148	65.605	J05
J	J12 / J13	65.605	66.063	J13

Each step = 1 course (457.2). 2 FB crs = the high-side house carrying the second footing course.

NOTES

1. Footing course (FB) = ONE course of Nudura ICF (6in XR35 external, 6in Standard party walls) below each house's GF FFL, on a strip footing BY OTHERS (engineer to design). Blocks step a whole course (457.2) at the party walls to follow the ground; at each step the house on the HIGH side takes 2 FB courses on the front and rear walls so the footing steps at its far party wall (one course at every other house). Level joints never cut.
2. FFL per pair of houses = mean existing ground (EA LiDAR DTM 1 m, front + rear faces) + 150, whole-course steps. Front-to-back cross-falls regraded by others (external works). No proposed levels issued (outline): levels, steps and footing depths for the engineer / architect to confirm.
3. Developed elevations: the front wall seen from the front, left to right; horizontal 1:400, vertical 1:100 (x4). Forms = FB level of each block's quotation take-off (Report Tool optimiser).

REVISIONS

REV	DATE	DESCRIPTION

Nudura™ BuildEase

CLIENT: Cuckfield Real Estate Ltd	PROJECT: Redcatch Quarter, Knowle, Bristol

DRAWING TITLE
STEPPED FOUNDATION ICF SCHEDULE

Footing course ICF per block: FFL, steps, courses, forms

SCALE	SIZE	DATE
AS SHOWN	A3	10.11.26
DRAWN: TS	CHECKED	APPROVED

STATUS	DRAWING No.	REV
QUOTATION	ES26-064-FD-01	