
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

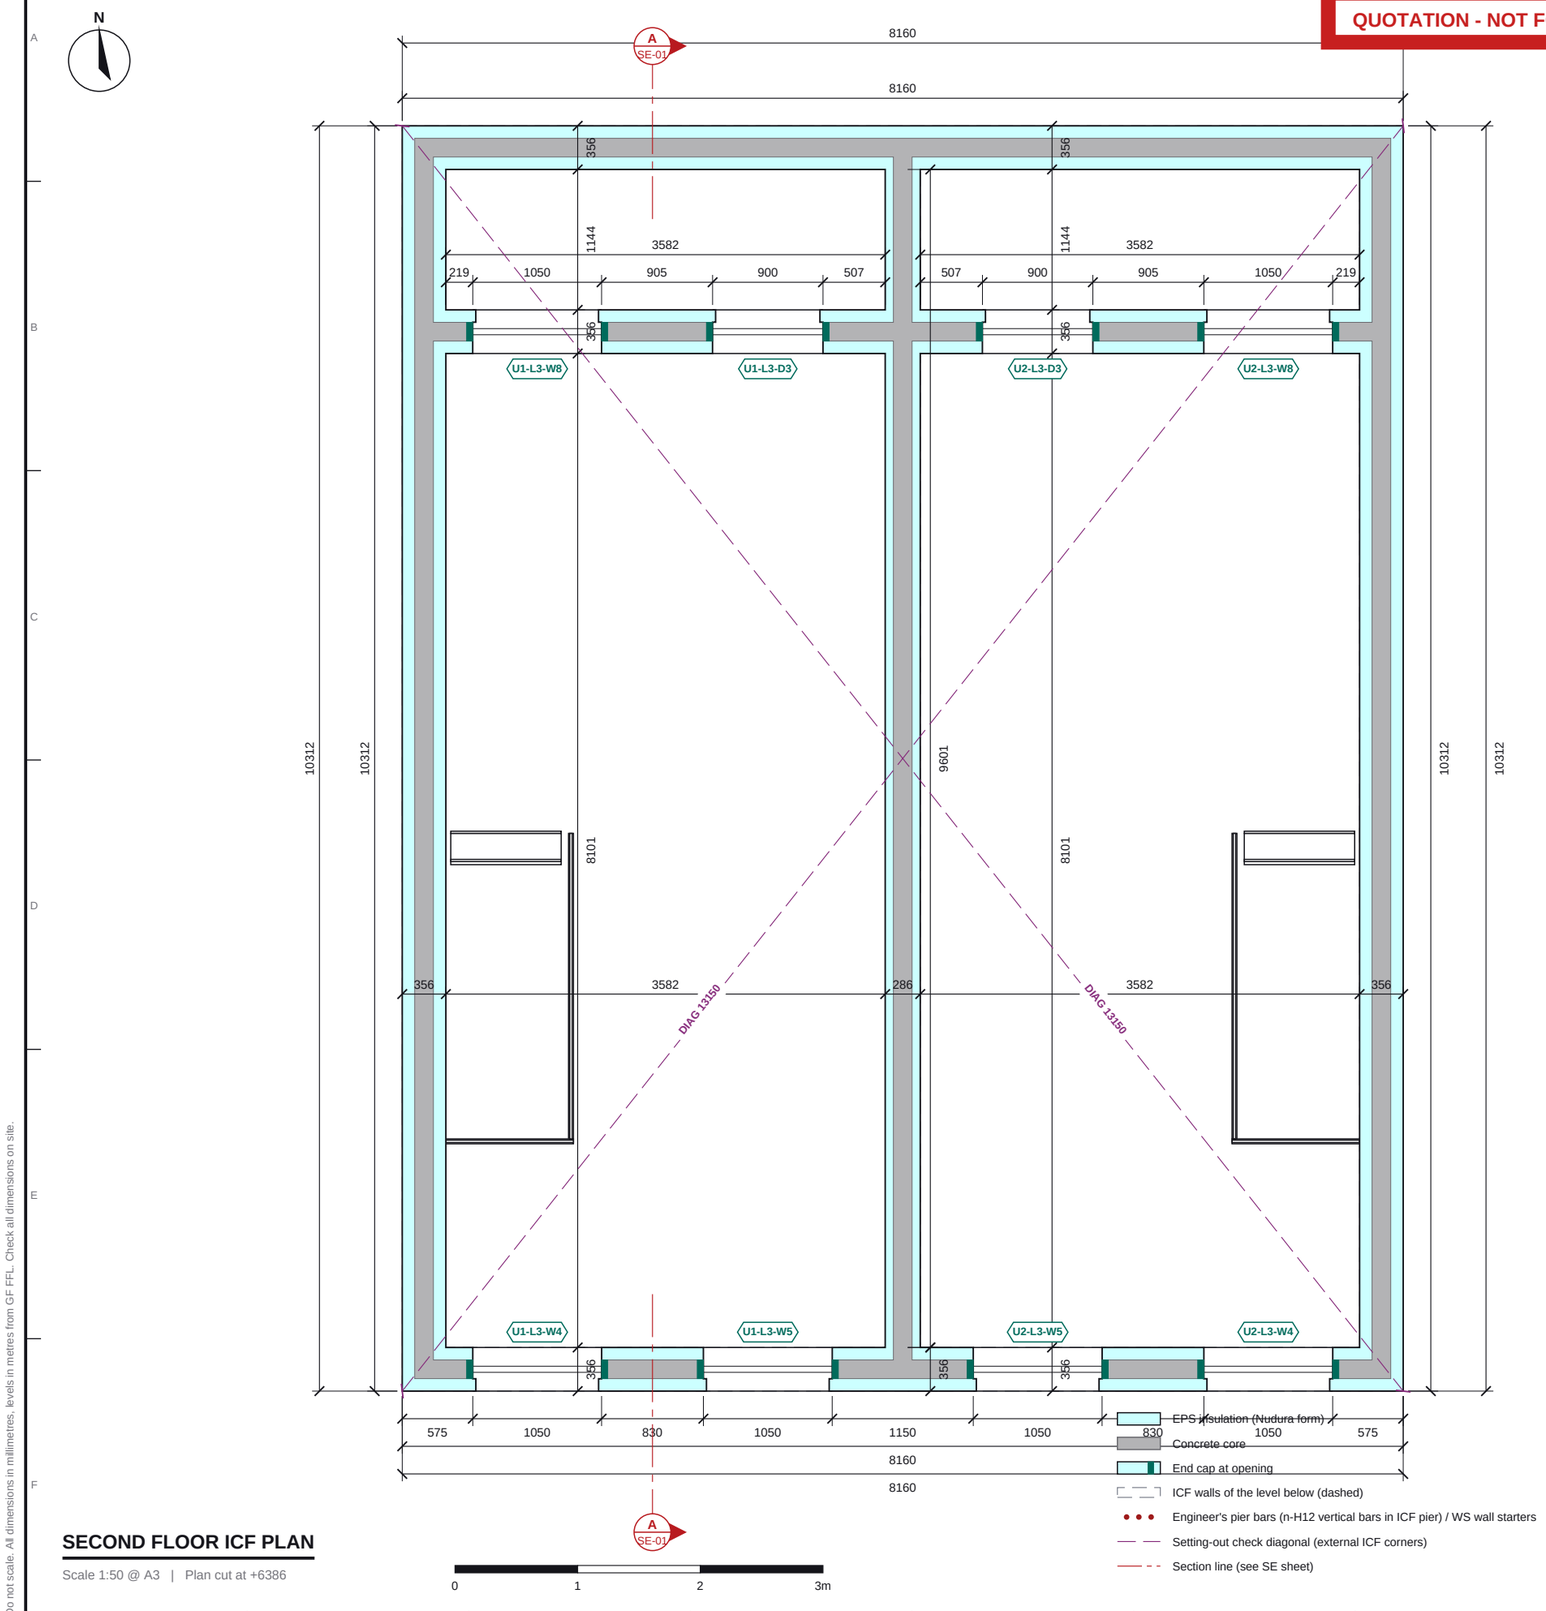

SECOND FLOOR ICF PLAN

Scale 1:50 @ A3 | Plan cut at +6386

SECOND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
U1-L3-W4	1050	1244	+6376	+7620	-
U1-L3-W5	1050	1244	+6376	+7620	-
U1-L3-W8	1050	1244	+6376	+7620	-
U1-L3-D3	900	2134	+5486	+7620	-
U2-L3-W4	1050	1244	+6376	+7620	-
U2-L3-W5	1050	1244	+6376	+7620	-
U2-L3-W8	1050	1244	+6376	+7620	-
U2-L3-D3	900	2134	+5486	+7620	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet (outline consent). ICF per the quotation models: 6in XR35 external walls on every level incl. the foundation course, 6in Standard party walls. Blocks stepped a whole course at the party walls to follow the existing ground (FFL per pair = mean LiDAR ground + 150; no proposed levels) - for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Redcatch Quarter, Knowle, Bristol

DRAWING TITLE

SECOND FLOOR ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:50	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-064-GA-04	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.