
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

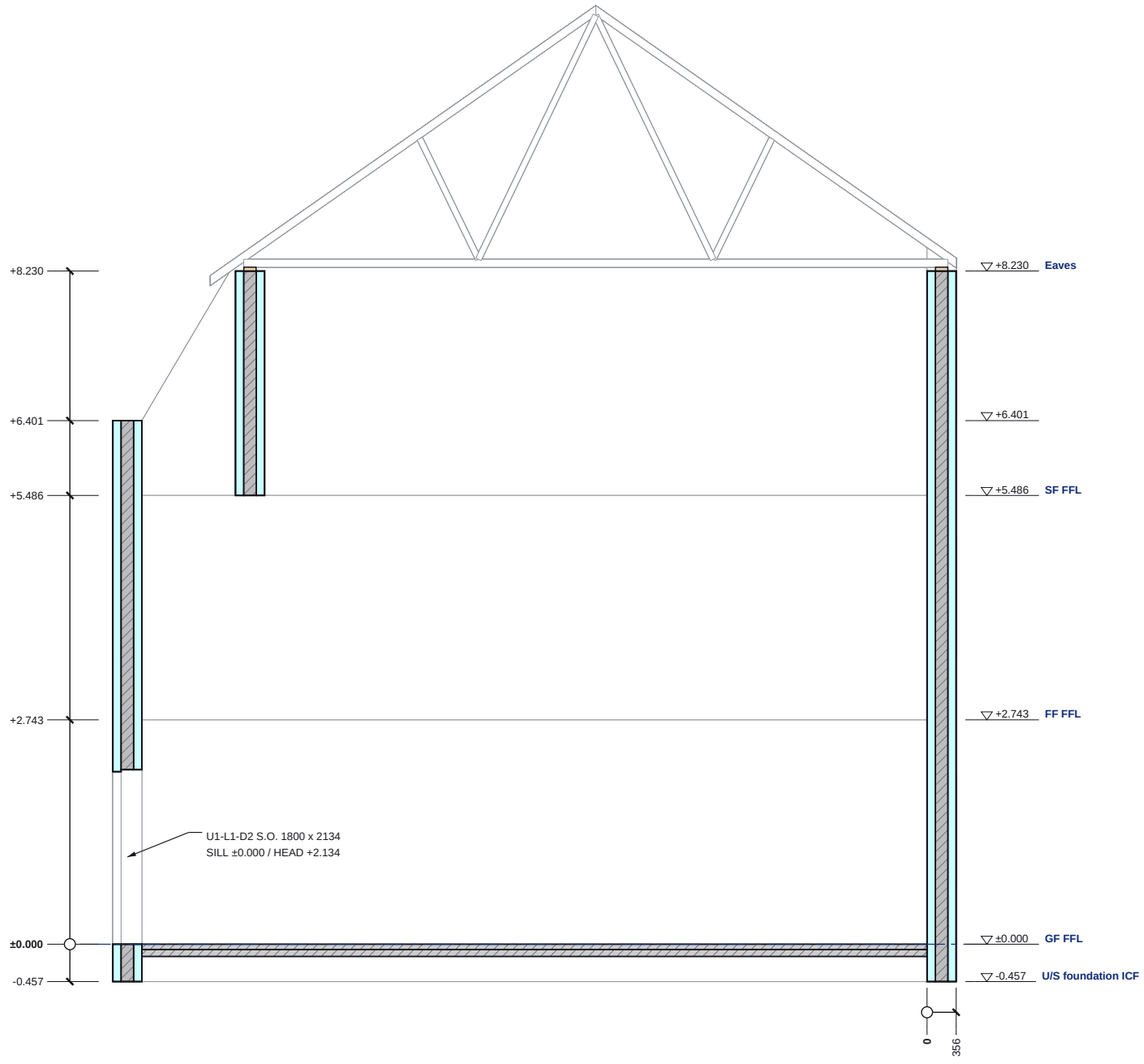

SECTION A-A

Scale 1:75 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Timber (cut)
Beyond the cut (line work)

0 1 2 3 4m


Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION A-A SCHEDULES

LEVELS ON THIS SECTION

Level	FFL
U/S foundation ICF	-0.457
GF FFL	±0.000
FF FFL	+2.743
SF FFL	+5.486
top of ICF W02	+6.401
Eaves	+8.230

SECTION KEY

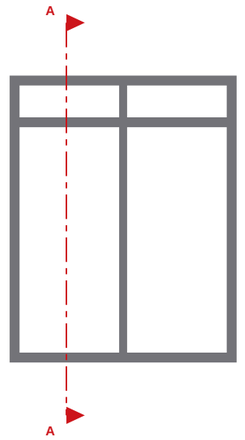

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. No structural design exists yet (outline consent). ICF per the quotation models: 6in XR35 external walls on every level incl. the foundation course, 6in Standard party walls. Blocks stepped a whole course at the party walls to follow the existing ground (FFL per pair = mean LiDAR ground + 150; no proposed levels) - for the engineer's review.
4. Steel marks, BOS / TOS: rev -. See ES26-064-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Redcatch Quarter, Knowle, Bristol

DRAWING TITLE
SECTION A-A
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:75	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-064-SE-01	-